


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	ローグレア スポットライト	保守率	
器具品番	SP32W-MLW SP32W-MLB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	3200lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

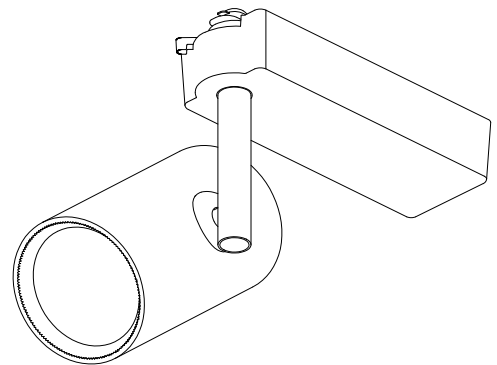


照明率表


作業面照明率(×0.01)

(%) 反射率	天井	80								70								50						30				0
		壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0			
			床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	34	32	28	27	25	25	23	33	31	28	27	25	25	23	28	27	25	24	23	25	24	23	22				
	0.6	43	40	38	36	35	34	32	43	40	38	36	35	34	32	37	36	34	33	32	34	33	32	31				
	0.8	49	44	43	41	40	38	37	48	44	43	41	40	38	37	42	40	39	38	37	39	38	36	36				
	1	52	47	47	44	44	41	40	51	46	46	43	43	41	40	45	43	42	41	40	42	41	39	39				
	1.25	55	49	50	46	47	44	43	54	48	49	46	47	44	43	48	45	45	44	42	44	43	42	41				
	1.5	57	50	52	48	49	46	44	55	49	51	47	49	46	44	50	47	47	45	44	46	45	44	43				
	2	59	52	56	50	53	48	47	58	51	54	49	52	48	47	52	48	50	47	46	48	47	46	45				
	2.5	61	53	58	51	55	50	48	59	52	56	51	54	49	48	54	50	52	49	48	50	48	47	46				
	3	62	53	59	52	57	51	50	60	53	58	51	56	50	49	55	51	53	50	49	51	49	48	47				
	4	64	54	61	53	59	52	51	62	53	60	53	58	52	51	56	52	55	51	50	53	50	50	49				
	5	65	55	63	54	61	53	53	62	54	61	53	59	53	52	57	52	56	52	51	54	51	51	49				
	7	66	55	64	55	63	54	54	63	55	62	54	61	54	54	59	53	58	53	53	55	52	52	51				
10	67	56	66	55	65	55	55	64	55	64	55	63	55	55	60	54	59	54	54	56	53	53	51					

配光曲線

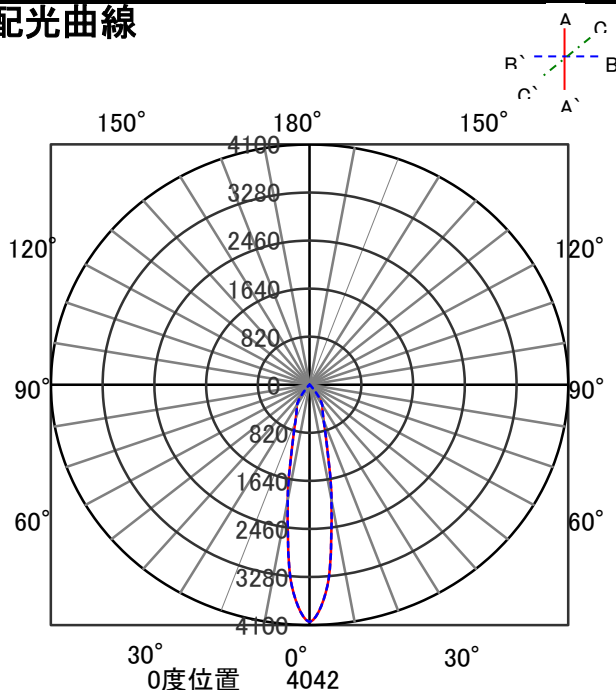

直射水平面照度

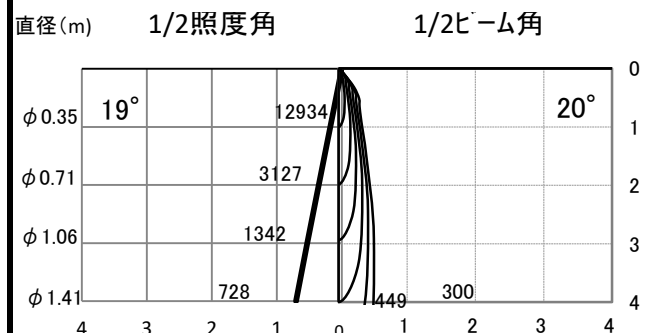

保守率1.0 単位=Lx